


1. To begin, power off the unit.
2. Locate the 2 screws that hold the sensor in place on the right side of the disc picker assembly.
3. While supporting the sensor loosen both screws and slightly move the sensor upward. Tighten both screws.

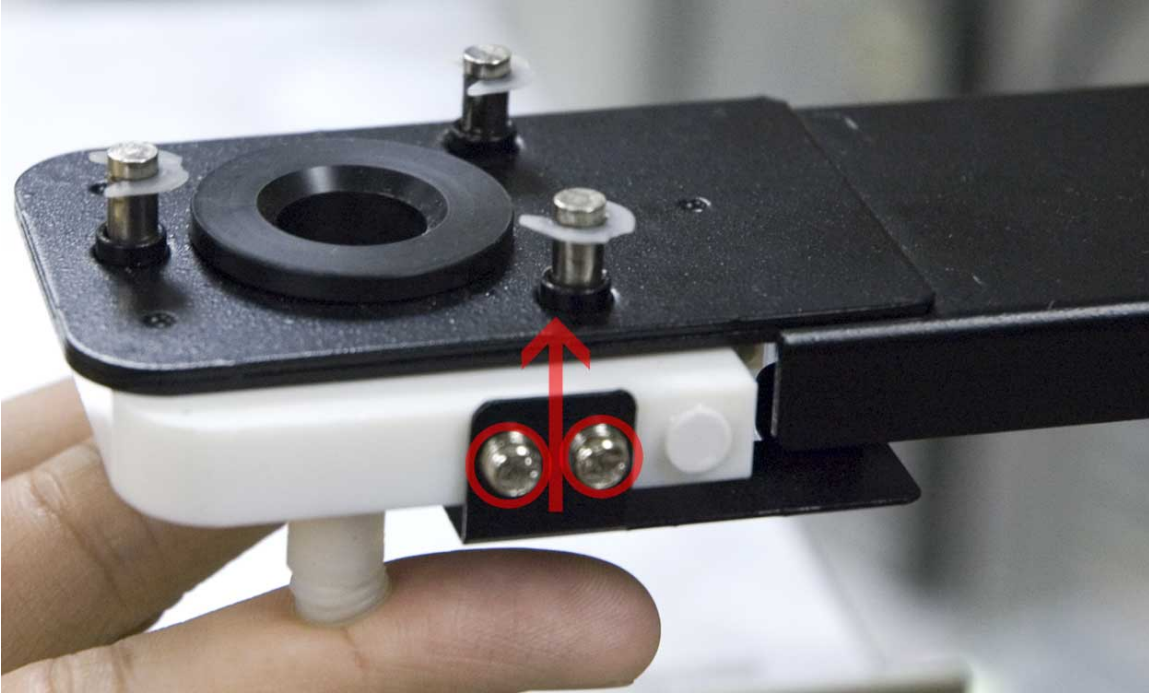

4. Turn the unit on and allow it to go through its calibration procedure.